

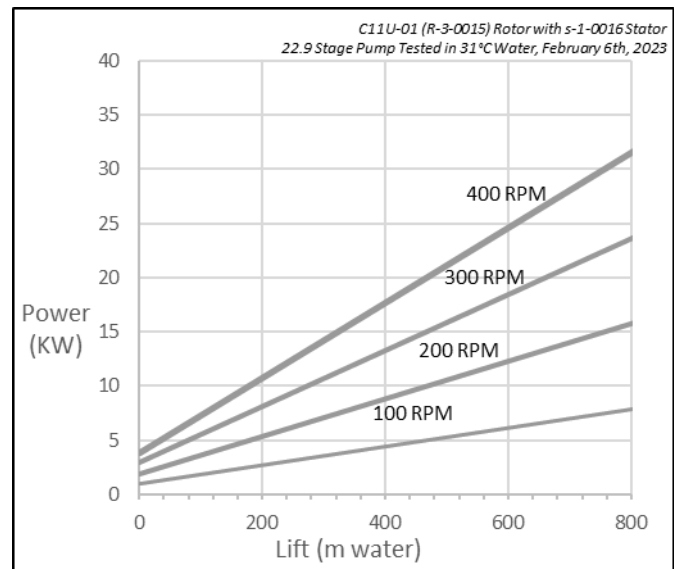
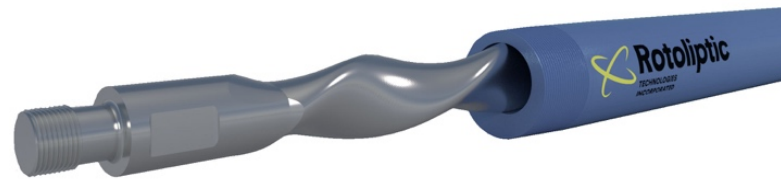
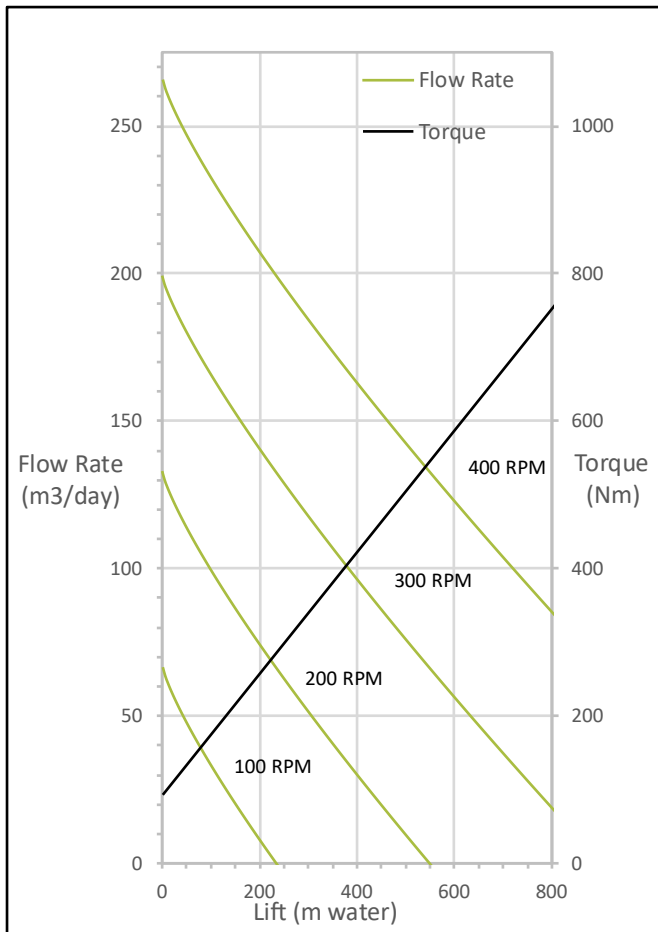
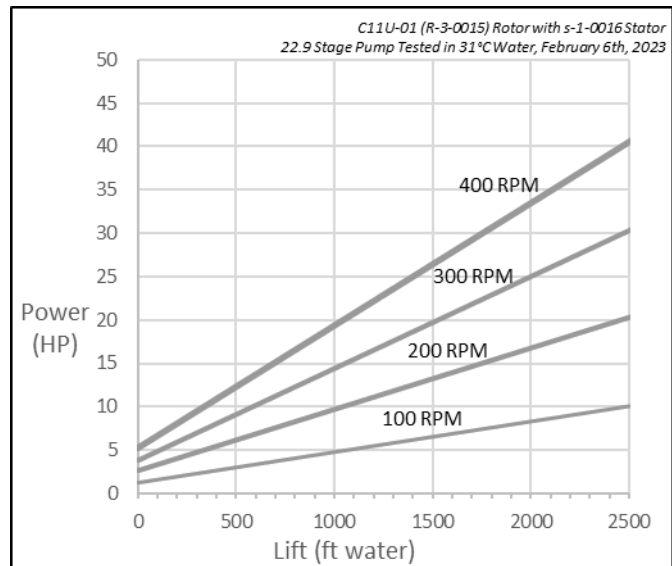


PUMP DESIGN			OPERATION RECOMMENDATIONS		
Nominal Flow Rate @100rpm	65	m <sup>3</sup> /d	Speed Range	100-400	rpm
Eccentricity	5.8	mm	Rated Lift	800	m
Cross Sectional Flow Area	1443	mm <sup>2</sup>	Consult Rotoliptic for application guidance and increased lift capability		
Enclosed Cavities	23				
STATOR SPECIFICATIONS			ROTOR SPECIFICATIONS		
Stator Connections	3-1/2" EUE Pin		Rotor Connection	1" API Pin	
Stator OD	95.76	mm	Rotor OD	59.43	mm
Stator Coupling OD - Regular (Special Clearance)	114.3 (106.2)	mm	Rotor Orbit Diameter (Regular and Slim Hole Coupling)	71	mm
Stator ID/ Thru Bore	47.8	mm	Rotor Length (Overall)	4547	mm
Stator Length (Overall)	3912	mm	Rotor Weight	59	kg
Stator Weight	126	kg			

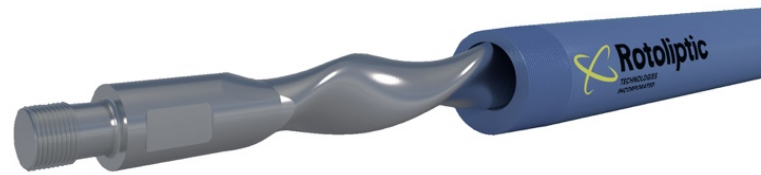

*Performance based on 1cP water at 20°C; behaviour will vary according to specific fluid conditions. Performance specifications provided for general guidance purposes only and actual performance obtained with use of products may vary. Rotoliptic reserves the rights to modify the specifications, without notice. Consult a Rotoliptic representative for specific performance guidance, completion recommendations, and other operating guidance.*

PUMP DESIGN			OPERATION RECOMMENDATIONS		
Nominal Flow Rate @100rpm	409	bbl/d	Speed Range	100-400	rpm
Eccentricity	0.23	in	Rated Lift	2625	ft
Cross Sectional Flow Area	2.24	in <sup>2</sup>	Consult Rotoliptic for application guidance and increased lift capability		
Enclosed Cavities	23		ROTOR SPECIFICATIONS		
STATOR SPECIFICATIONS			Rotor Connection	1" API Pin	
Stator Connections	3-1/2" EUE Pin		Rotor OD	2.34	in
Stator OD	3.77	in	Rotor Orbit Diameter (Regular and Slim Hole Coupling)	2.80	in
Stator Coupling OD - Regular	4.50	in	Rotor Length (Overall)	179	in
Stator Coupling OD - Special Clearance	4.18	in	Rotor Weight	130	lbs
Stator ID/ Thru Bore	1.88	in			
Stator Length (Overall)	154	in			
Stator Weight	278	lbs			

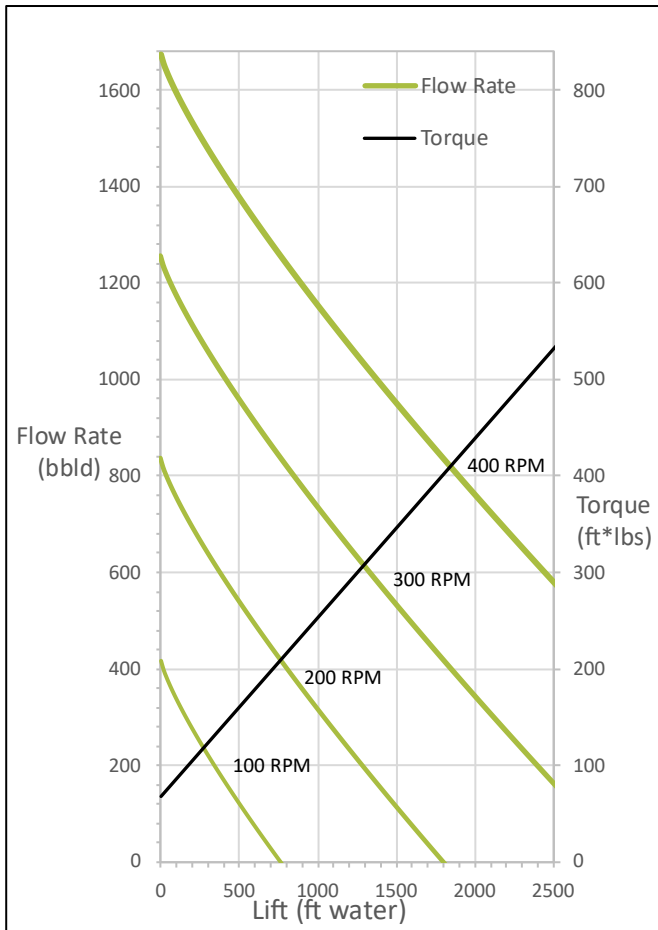

Performance based on 1cP water at 68F; behaviour will vary according to specific fluid conditions. Performance specifications provided for general guidance purposes only and actual performance obtained with use of products may vary. Rotoliptic reserves the rights to modify the specifications, without notice. Consult a Rotoliptic representative for specific performance guidance, completion recommendations, and other operating guidance.