
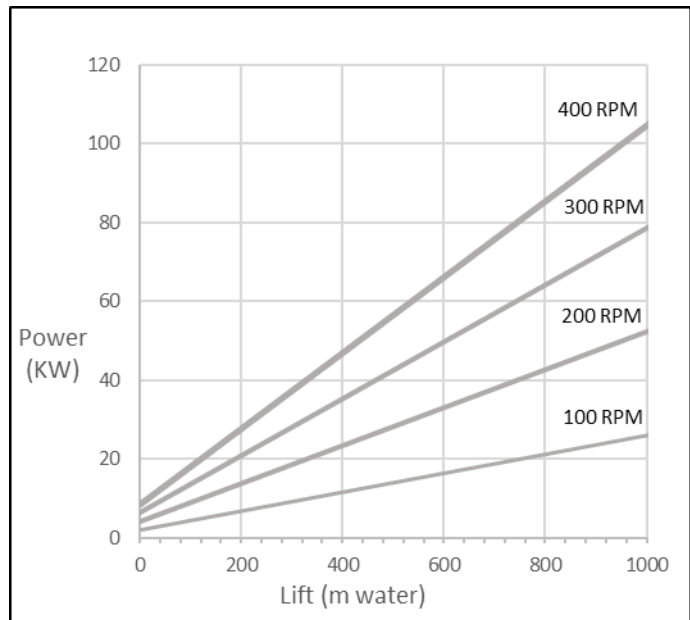
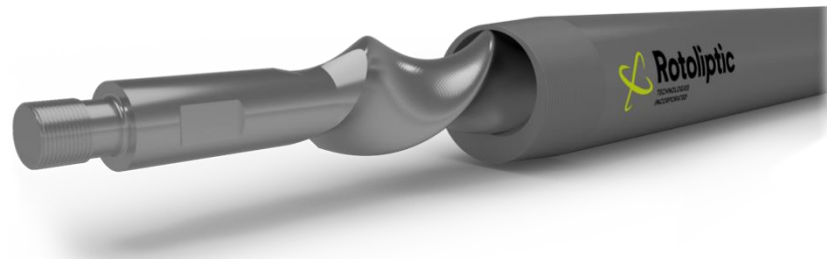


PUMP DESIGN		
Nominal Flow Rate @100rpm	200	m ³ /d
Eccentricity	11.4	mm
Cross Sectional Flow Area	4630	mm ²
Enclosed Cavities	31.6	
STATOR SPECIFICATIONS		
Stator Connections	5-1/2" LTC Pin	
Stator OD	140	mm
Stator Coupling OD	154	mm
Stator ID/ Thru Bore	73.7	mm
Stator Length (Overall)	5054	mm
Stator Weight	297	kg

OPERATION RECOMMENDATIONS		
Speed Range	100-400	rpm
Rated Lift	1000	m
Consult Rotoliptic for application guidance and increased lift capability		
ROTOR SPECIFICATIONS		
Rotor Connection	1-1/8" API MOD Pin	
Rotor OD	97	mm
Rotor Orbit Diameter (Regular and Slim Hole Coupling)	119	mm
Rotor Length (Overall)	5715	mm
Rotor Weight	171	kg

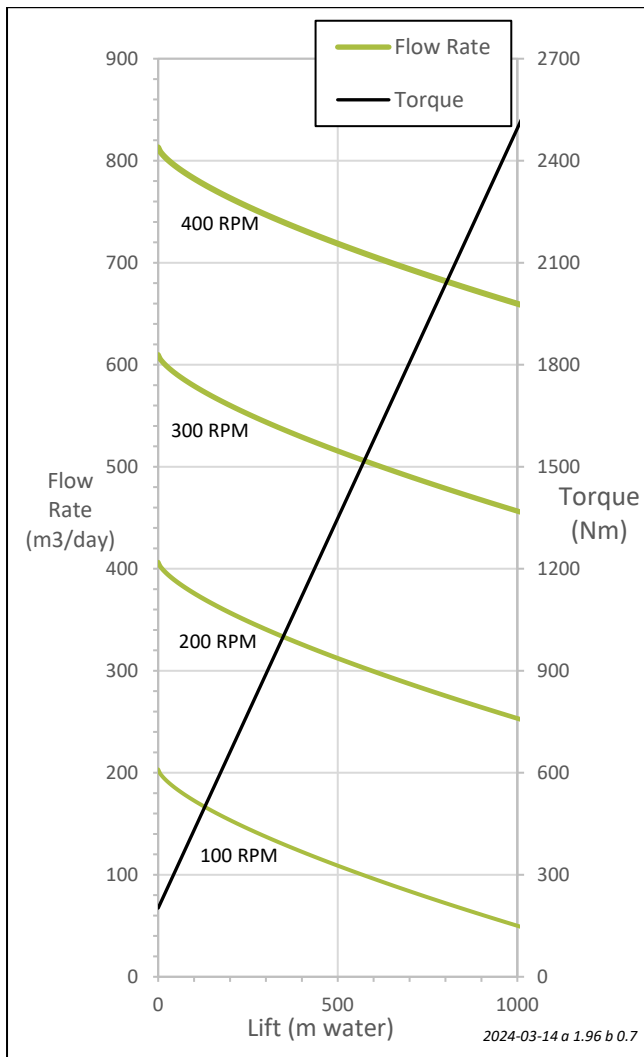




Performance based on 1cP water at 20°C; behaviour will vary according to specific fluid conditions. Performance specifications provided for general guidance purposes only and actual performance obtained with use of products may vary. Rotoliptic reserves the rights to modify the specifications, without notice. Consult a Rotoliptic representative for specific performance guidance, completion recommendations, and other operating guidance.

PUMP DESIGN		
Nominal Flow Rate @100rpm	1279	bbld
Eccentricity	0.45	in
Cross Sectional Flow Area	7.18	in ²
Enclosed Cavities	31.6	

STATOR SPECIFICATIONS		
Stator Connections	5-1/2" LTC Pin	
Stator OD	5.5	in
Stator Coupling OD	6.05	in
Stator ID/ Thru Bore	2.9	in
Stator Length (Overall)	199	in
Stator Weight	656	lbs

OPERATION RECOMMENDATIONS		
Speed Range	100-400	rpm
Rated Lift Consult Rotoliptic for application guidance and increased lift capability	3300	ft

ROTOR SPECIFICATIONS		
Rotor Connection	1-1/8" API MOD Pin	
Rotor OD	3.8	in
Rotor Orbit Diameter (Regular and Slim Hole Coupling)	4.7	in
Rotor Length (Overall)	225	in
Rotor Weight	377	lbs

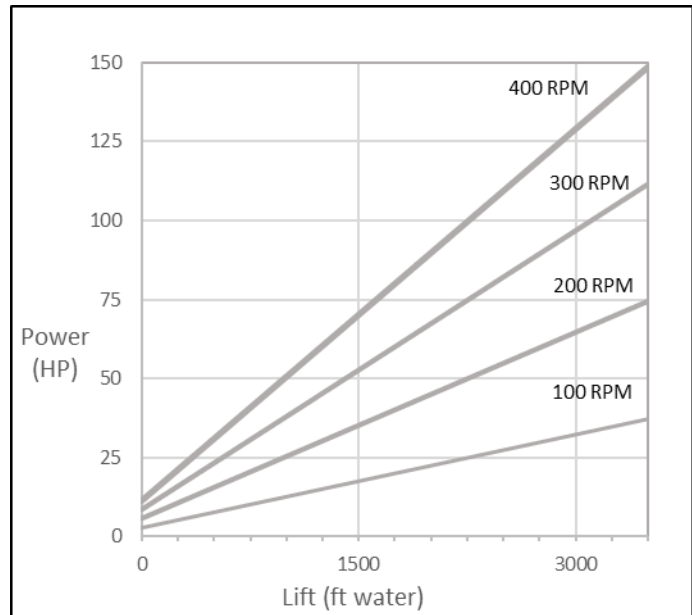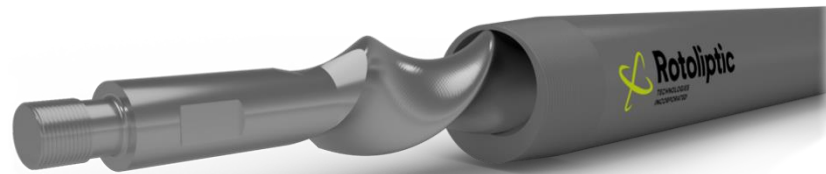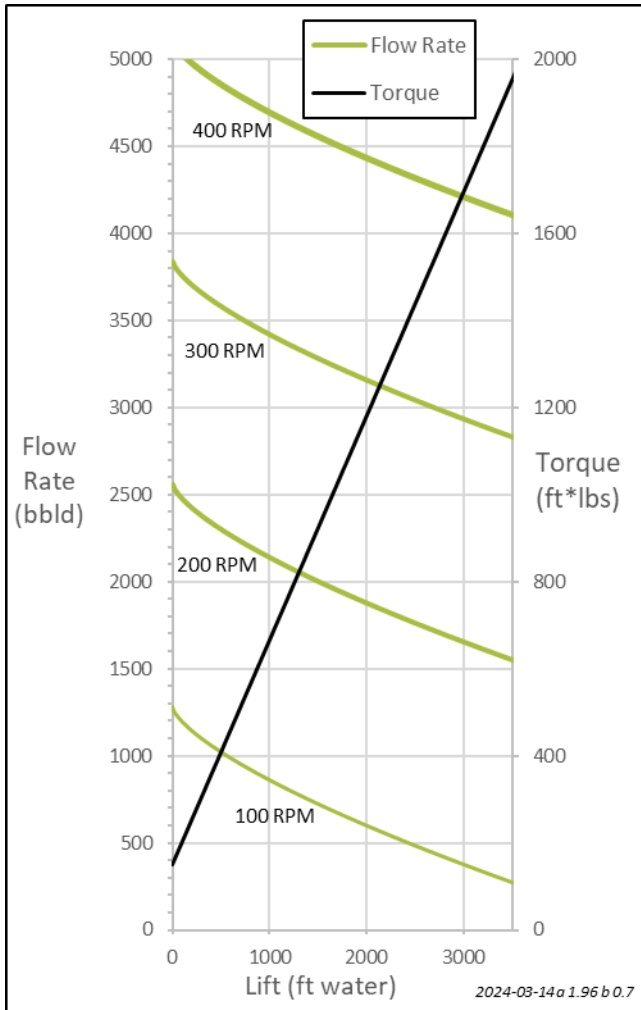

Performance based on 1cP water at 68 F; behaviour will vary according to specific fluid conditions. Performance specifications provided for general guidance purposes only and actual performance obtained with use of products may vary. Rotoliptic reserves the rights to modify the specifications, without notice. Consult a Rotoliptic representative for specific performance guidance, completion recommendations, and other operating guidance.